



Poliflo BF

HIGH CAPACITY PLEATED POLYPROPYLENE FILTER ELEMENTS DESIGNED TO FIT SIZE 1 & 2 BAG FILTER HOUSINGS

Features and Benefits:

- Fits Many Existing Bag Housings
- Fewer Element Change-outs
- Lower Maintenance Costs
- Lower Disposal Costs
- Smaller Filter Vessels
- High Surface Area
- High Flow Capacity
- Available in 1, 5, 10, 20, 40, 70,

Pleated Cartridge

- Support and Drainage: Polypropylene
- Pleated staching polypropylene non woven fiber
- Inner core: Polypropylene

Optional Tailored Features:

- Polypropylene Spiral Outerwrap
- All FDA materials
- O-Ring EPDM

Pleated Polypropylene Media Features:

- High Performance “Poliflo” Media
- Flow Rates, and Particle removal Cut Off
- Heavy, Dual Drainage Layers Prevent Fiber Migration and Assure Even Flow Distribution
- High Efficiency
- Long Life and Superior Dirt Holding




Standard product dimensions:


- **Length:** Size 1 / Size 2
- **Outside Diameter:** 6 in., nominal

Maximum Differential Pressure:

- 2,4 bar @ 20° C
- 1,8 bar @ 48,9° C
- Maximum Operating Temperature: 80°C

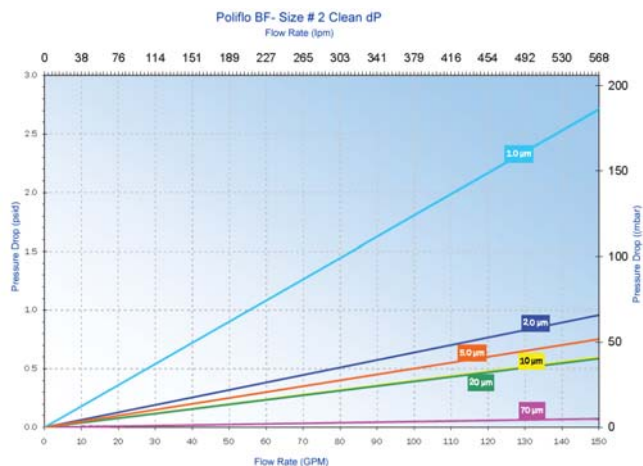

Poliflo BF - Size # 2 Dirt Holding (grams)

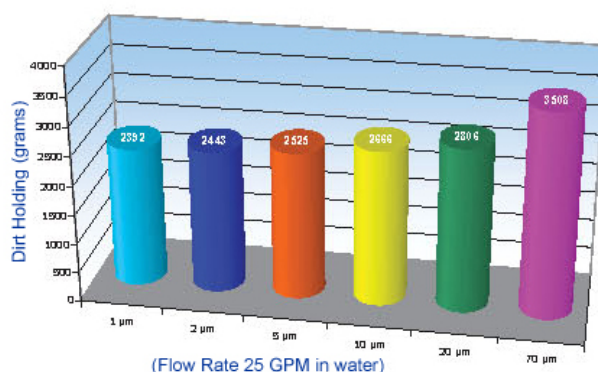

CARTRIDGES PART NUMBERING GUIDE

BF PP 2 10 P E X

Code	Media	Code	Length	Code	Micron rating	Code	End configuration	Code	Gasket material	Code	Version
PP	Polypropylene	1	size 1	001	1 μ	A	BF Universal	E	EPDM	X	Special
		2	size 2	005	5 μ			B	BUNA-N		
		x	Special	010	10 μ			V	VITON		
			length	020	20 μ			S	SILICONE		
				040	40 μ						
				070	70 μ						

51_02_EN



UK Office:

Envirogen Group
Unit 14a Bromyard Road
Trading Estate
Bromyard Road, Ledbury
Herefordshire HR8 1NS
Tel: +44 (0) 1531 636328
E: info@envirogen.com
www.envirogen.com



Italian Office:

Envirogen Group Italy S.p.A
Viale De GASPERI,88/B
20017 Mazzo di Rho Milano
Tel: +39 (0)2 93959.1
E: info.it@envirogen.com
www.envirogen.com



USA Office:

Envirogen Technologies
Two Kingwood Place
700 Rockmad Dr. Suite 105
Kingwood, TX 7739
Tel: +1 877.312.8950
E: info@envirogen.com
www.envirogen.com