

Flusint Fiber Pleated

PLEATED SINTERED METAL FIBRE FILTER CARTRIDGES



Introduction

Manufactured from randomly laid metal fibres, sinter-bonded to form a uniform high porosity filter medium, FFP demonstrates a significantly low pressure drop, high permeability and excellent dirt holding capacity.

Pleated sintered metal fibre increases the available filtration area of a filter element, thereby further increasing dirt holding capacity and so minimising maintenance and maximising on-stream processing.

With the feasibility to formulate metal fibres to meet specific application requirements combined with inherent durability, sintered metal fibre filters can be cleaned *in situ* without interrupting process flow thereby providing the ultimate in process economics by reducing downtime to a minimum.

Features and Benefits

- Resistant to high temperatures and corrosive environments.
- High void volume.
- Excellent cleanability and dirt holding capacity.
- Minimal maintenance costs.
- Pleatable structure, offering higher filtration area per cartridge.
- Available in 316L as standard with other alloys such as Inconel[®] 601, Hastelloy[®] X, NiCrMo Alloy 59 and Fecralloy[®] on request.

Typical Applications

- Catalyst recovery and retention
- Gasification and chemical production
- Vent filters
- Agrochemical
- Steam filtration
- Culinary steam
- Process steam
- Pharmaceutical powder recovery
- Polymer melt

Specifications

Materials of Manufacture

316L stainless steel standard. Inconel®, Hastelloy®, NiCrMo Alloy 59 and Fecralloy® on request or by process selection. Additional alloys are available on request.

Element Dimensions*

Diameter:	66mm	(2.6") standard
Length:	05:	125mm (5")
	10:	250mm (10")
	20:	498mm (20")
	30:	745mm (30")
	40:	1012mm (40")

* Other diameters and lengths available on request.

Effective Filtration Area

0.05m² (0.55ft²) per 250mm (10") cartridge.

Gaskets and O-Rings*

EPDM as standard. Chemraz®, nitrile, PTFE, silicone, Viton®, FEP coated EPDM, FEP coated silicone, FEP coated Viton® available on request or by process selection.

* FDA approved seals are available.

Typical Maximum Differential Pressure* (all lengths)

Normal flow direction:	25bar (363psi)
Reverse flow direction:	3bar (44psi)

* Grade dependant.

Operating Temperature


Maximum continuous:	From -195°C (-319°F) to 340°C (644°F) seal limiting.
	From -269°C (-452°F) to 1000°C (1832°F) alloy limiting.

FFP Stainless Steel Media Grades


Micron Rating (µm) micron code	Liquids (µm)* 99.9% efficiency	Gases (µm) 99.9% efficiency
3 (0003)	3	1
5 (0005)	5	1.5
10 (0010)	10	3
15 (0015)	15	4
20 (0020)	20	6
30 (0030)	30	8
40 (0040)	40	11
60 (0060)	60	16

* Single Pass Efficiency Test in accordance with ASTM795 ACFTD.


Typical Flow Rates in Water*

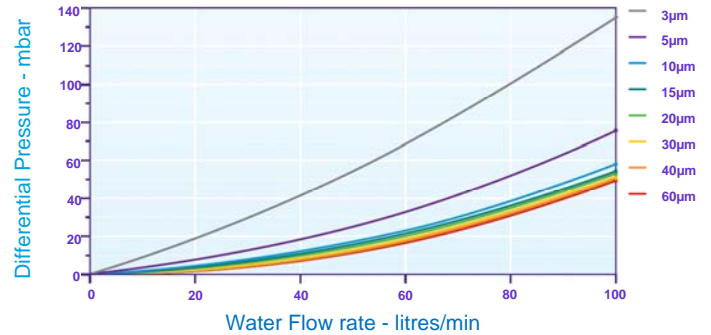

Typical Flow Rates in Air*

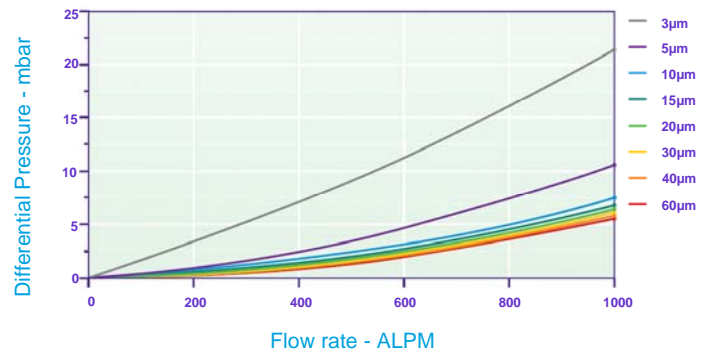


Typical Flow Rates in Steam*

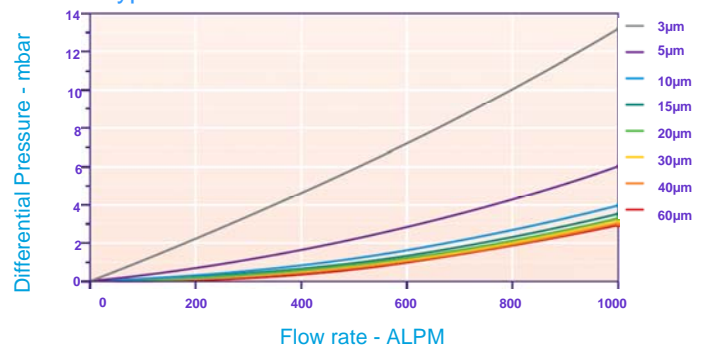

* Using a 10 inch element, at ambient temperature

ORDERING INFORMATION

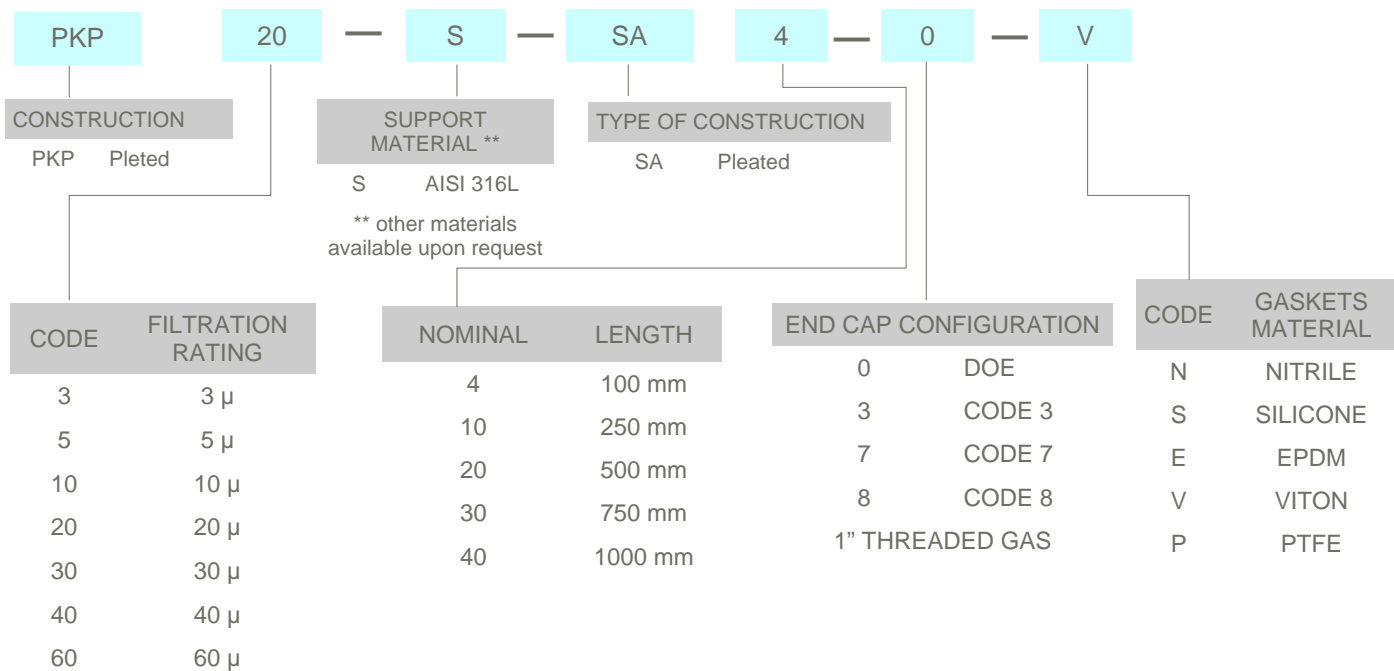

UK Office:

Envirogen Group
 Unit 14a Bromyard Road
 Trading Estate
 Bromyard Road, Ledbury
 Herefordshire HR8 1NS
 Tel: +44 (0) 1531 636328
 E: info@envirogen.com
 www.envirogen.com



Italian Office:

Envirogen Group Italy S.p.A
 Viale De GASPERI,88/B
 20017 Mazzo di Rho Milano
 Tel: +39 (0)2 93959.1
 E: info.it@envirogen.com
 www.envirogen.com



USA Office:

Envirogen Technologies
 Two Kingwood Place
 700 Rockmad Dr. Suite 105
 Kingwood, TX 7739
 Tel: +1 877.312.8950
 E: info@envirogen.com
 www.envirogen.com