

# POINT-OF-USE FILTER FOR PREVENTION OF LEGIONELLA

Leaflet V-10-01



# FLUXA

**Fluxa  
Filtri  
S.p.A.**

V.le A. De Gasperi, 88/B-20017 Mazzo di Rho (MI)  
Tel. 0293959.1 (15 lines)  
Fax 0293959.400-440-470  
e-mail: info@fluxafiltri.com - www.fluxafiltri.com

**Agent for South Italy:**  
**Sire srl** - Via Sannio, 9 - 80146 Napoli  
Tel. 0817349254 – 0817349310  
Fax 0817349317

## Point-of-use filter for prevention of Legionella

Easy to fit point-of-use shower filter unit for prevention of Legionella and other waterborne pathogens

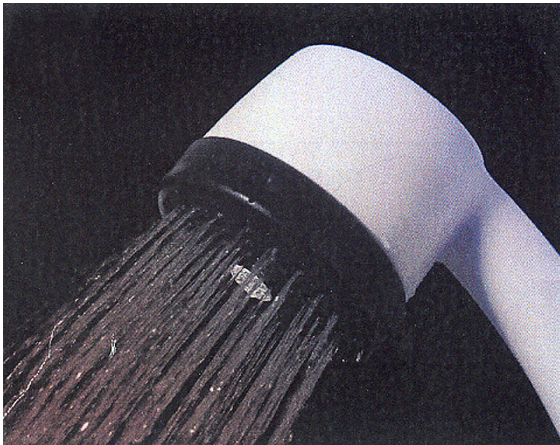


Photo 1: Point-of-use Shower Filter Unit

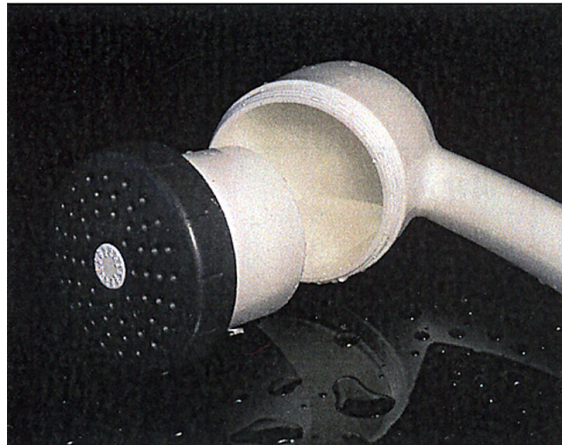


Photo 2: Filter Unit components

Ideally suited for prevention of infections such as legionellosis in hospital environs, sports and recreational facilities and institutional facilities.

### FEATURES AND BENEFITS

- Easy to install filtration unit for standard shower hoses
- Easy to replace filter cartridge
- Contains microfiltration filter cartridge for capture of Legionella microorganisms
- CE certified
- Non pyrogenic
- Biosafe-materials meet USP Class VI
- Self venting
- Manufactured under clean room conditions for compliance with ISO 9001
- Filter cartridges proven to be quantitatively retentive of  $10^7$  organisms/cm<sup>2</sup> *Brevundimonas diminuta*

## TECHNICAL INFORMATION

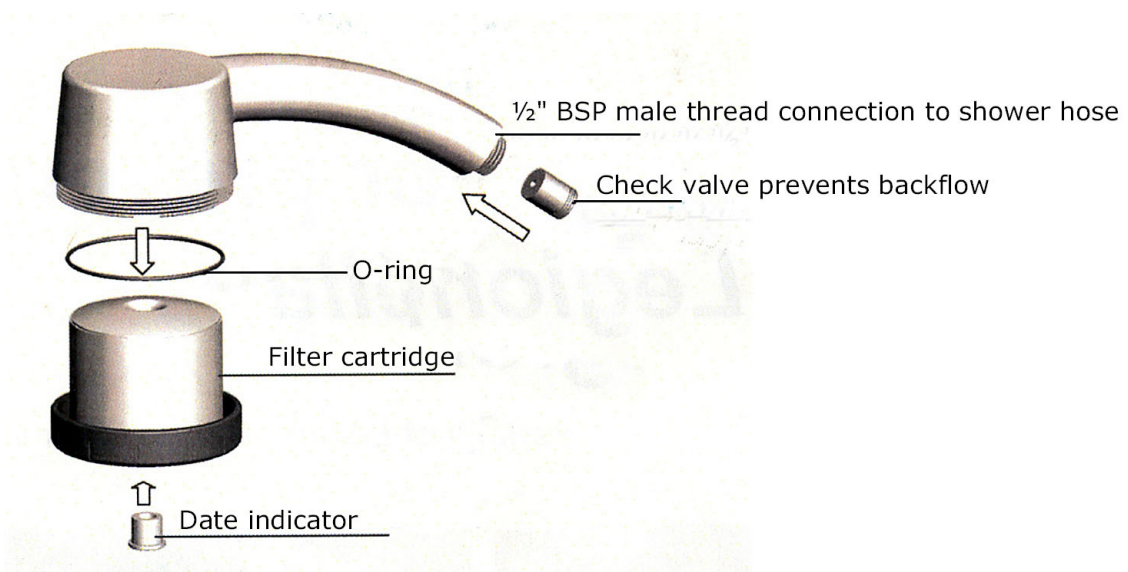


Figure 1: Diagram of shower filter components

<b>Filter Media:</b>	PES and PVP
<b>Pore Size:</b>	0.2 $\mu$
<b>Change-out:</b>	3 months
<b>Connection:</b>	1/2" BSP
<b>Max. operating pressure:</b>	4 Bar g
<b>Max. operating temperature:</b>	50°C
<b>Typical Water Flow Rate</b>	12L/min @ 2Bar g

## CLEAN WATER FLOW RATES

