



FLUXA


**Fluxa
Filtri
S.p.A.**

V.le A. De Gasperi, 88/B-20017 Mazzo di Rho (MI)
Tel. 0293959.1 (15 lines)
Fax 0293959.400-440-470
e-mail: info@fluxafiltri.com - www.fluxafiltri.com

The largest automatic self-cleaning filter for fine filtration



- For flow rates up to 4000 m³/h
- Fine filtration degrees: 800 -10 micron
- Large filtration area of up to 40.000 cm²

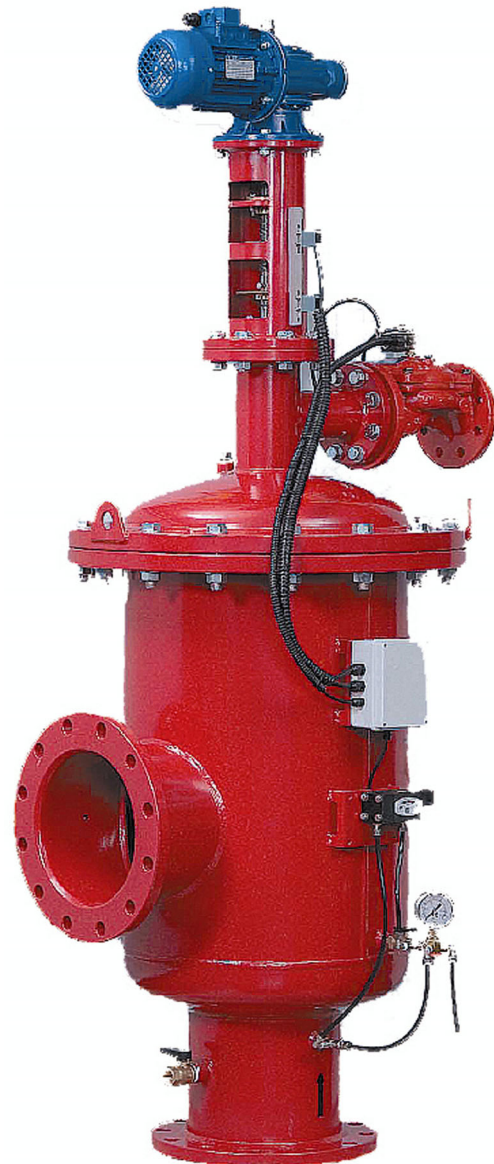

HOW THE "EBS" FILTERS WORK

The EBS is an automatic filter, with a self-cleaning mechanism driven by an electric motor. The EBS is designed to work with various types of screens in filtration degrees from 800 to 10 micron, and is available in 8" to 24" inlet/outlet diameter.

Filtering process:

Raw water flows into the filter through the cylindrical filter element from the inside-out, causing particles to accumulate on the inside screen surface which causes the development of a "filter cake". The accumulation of the filter cake causes pressure differential to develop between the filter inlet and outlet.

A pressure differential switch senses the pressure differential across the screen and when it reaches a preset value, the cleaning mechanism is operated.

Cleaning process:

The EBS begins the self-cleaning process when the pressure differential across the screen reaches a preset value or a pre-determined lapse of time. Cleaning of the filter's fine screen is carried out by the suction scanner which is a motor driven assembly that rotates while also moving linearly. It consists of a central tube with tubular nozzles equally spaced along the length of the central tube. An exhaust flush valve connects the internal cavity of the suction scanner to atmospheric pressure outside the filter body. By opening the exhaust valve, the differential pressure between the water inside the filter and the atmosphere outside the filter creates high suction forces at the openings of each of the suction scanner nozzles.

This suction force causes water to flow backwards through a small area of screen in front of each nozzle, pulling the filter cake off the screen and sucking it into the suction scanner and out through the exhaust valve to waste.

The driving mechanism rotates the suction scanner in a slow, controlled motion. The cleaning cycle is completed in approx. 30 seconds. During this time the nozzles cover 100% of the screen removing the filter cake from the entire screen surface. During the self-cleaning cycle, filtered water continues to flow downstream of the filter.

Control system:

The EBS filter is equipped with a pressure differential switch that transmits an electric signal to the electronic control board, which initiates the flush cycle.


A solenoid operates the exhaust valve by means of a hydraulic command or compressed air.

The filter operation and cleaning cycle is controlled and monitored by a Programmable Logic Control (PLC). The PLC allows maximum flexibility in control options and has many features that can be incorporated per customer's needs.

The MegaEBS:

The MegaEBS filter consists of four EBS screen elements and cleaning mechanisms within one housing. An integral control panel allows for sequential operation of the cleaning mechanisms, one-by-one, in pairs, or all four units simultaneously.

The Mega EBS is an excellent solution for applications with space limitations or when limited number of filter units is required.

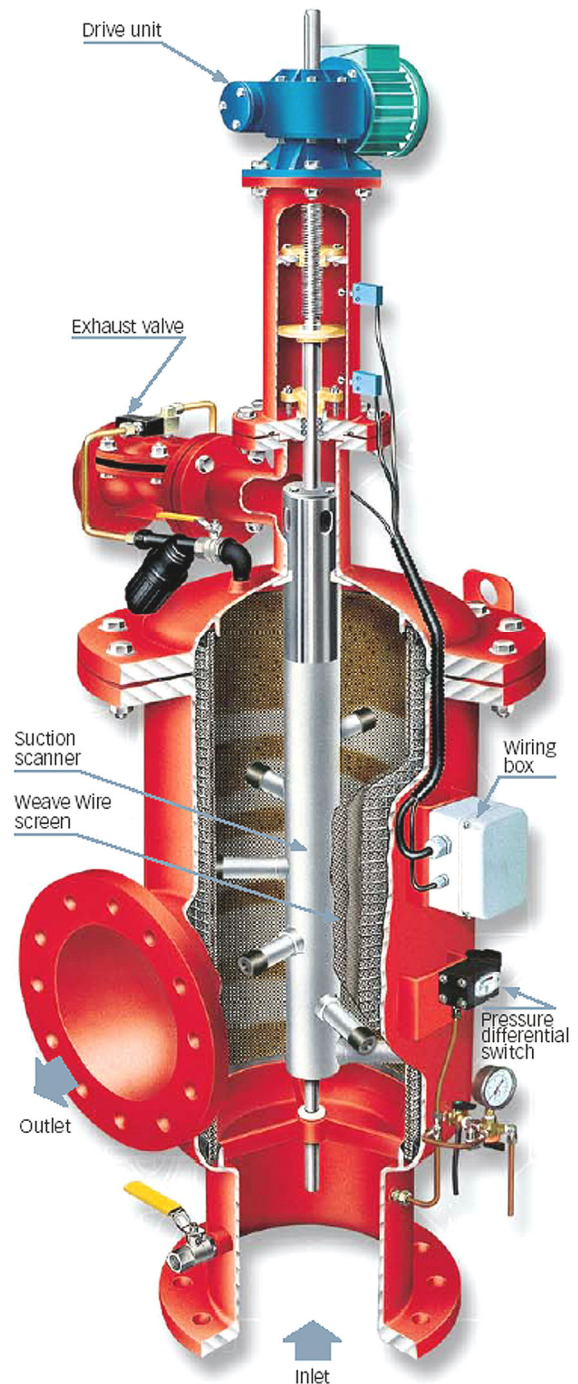

TECHNICAL SPECIFICATION

GENERAL

Filter type	EBS	MegaEBS	
Maximum flow rate [m ³ /h]	1,200	4,000	Consult manufacturer for optimum flow depending on filtration degree & water quality.
Min. working pressure [bar]	2	2	Pressure requirement depend on multiple factors. Please consult manufacturer.
Max. working pressure [bar]	10	10	16 bar upon request.
Filter area [cm ²]	10,000	40,000	
Inlet/Outlet diameter [mm] [inch]	200-400 8"-16"	400-600 16"-24"	Flange standard upon request.
Max. working temp. [°C]	60	60	95°C upon request.
Weight (Av) empty [kg]	350	2,250	
Volume (Av). [lit.]	200	2,800	

FLUSHING DATA

Exhaust valve [mm]; [inch]	80; 3"	4 x 80; 3"	
Wasted water per cycle [lit]	500	2,000	at 2 bar
Min. flow for flushing [m ³ /h]	50	200-50	at 2 bar
Flushing cycle time [sec.]	35-40	30-120	at 50 Hz

CONTROL AND ELECTRICITY

Electric MOTOR [HP]	½	4 x ½	20/24 Gear output RPM
Control voltage [V]	24 AC		
Rated operation voltage	3 phase, 380 / 440 V 50/60 Hz		
Current consumption [Amp.]	1,5	5,0	

CONSTRUCTION MATERIALS*

Filter housing and lid	Epoxy-coated carbon steel 37-2
Screens	Four-layer Weave Wire stainless steel 316L
Cleaning mechanism	Stainless steel 316L, Acetal
Exhaust valve	Epoxy-coated cast iron, Natural rubber
Seals	Synthetic rubber, Teflon
Control	Aluminum, Brass, Stainless steel, Nylon, PVC


* Amiad offers a variety of construction materials, Consult manufacturer for specifications.

STANDARD FILTRATION DEGREES


	Weave Wire stainless screen									
micron	800	500	300	200	130	100	80	50	25	10
mm	0.8	0.5	0.3	0.2	0.13	0.1	0.08	0.05	0.02	0.01
mesh	20	30	50	75	120	155	200	300	450	600

SUGGESTED INSTALLATIONS

EBS

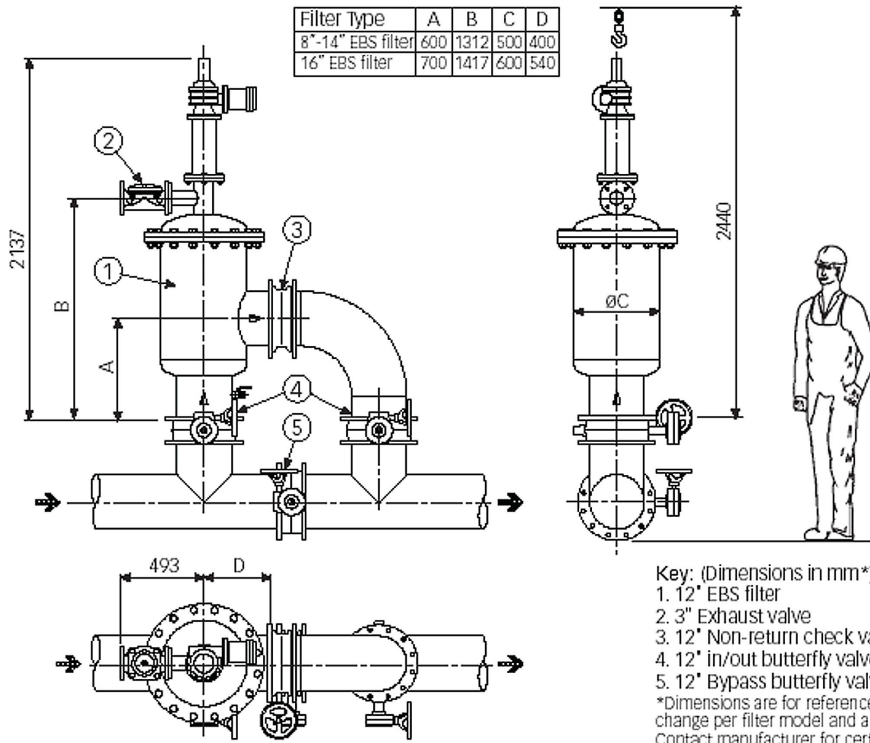



MEGA EBS

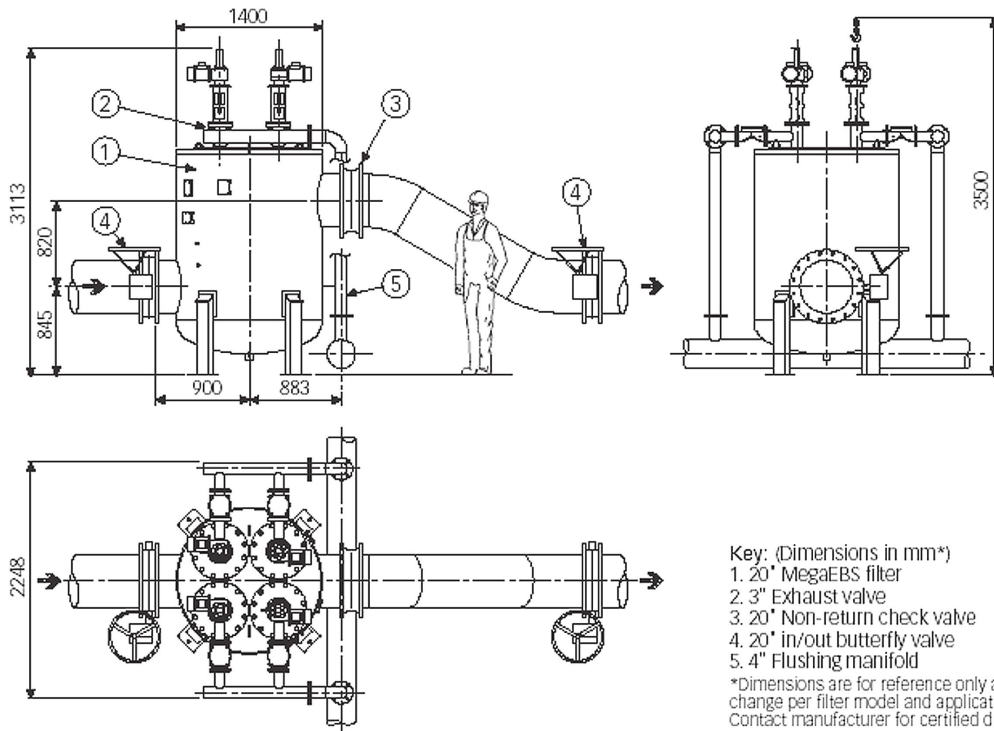

PRESSURE LOSS GRAPHS

EBS

MegaEBS

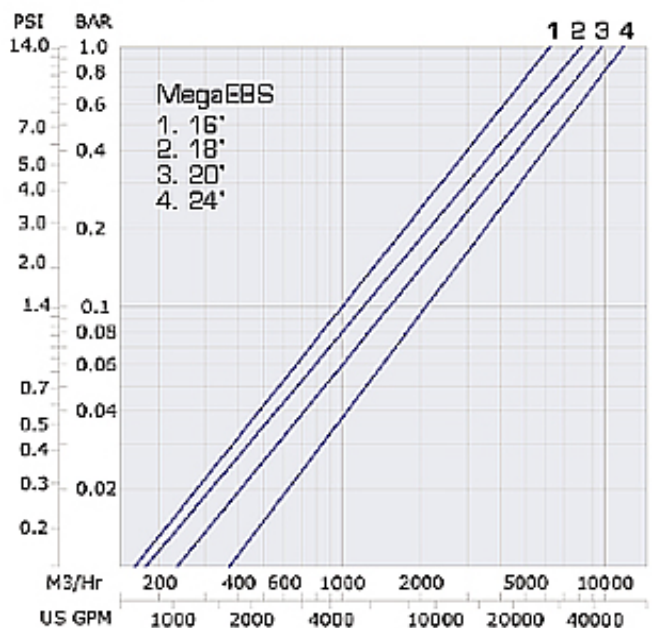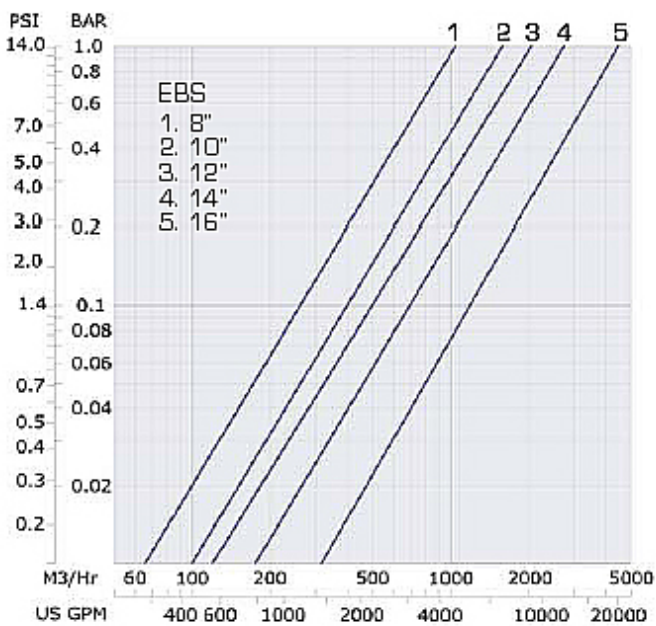

SELECTED WORLDWIDE APPLICATIONS



Pre-filtration to DWP. 375m³/h, 50µm. Dan river, Israel



Injection water on board FPSO. 220m³/h, 25µm. West Africa



Drip irrigation, 9000 m³/h, 130µm. China



Drip irrigation of strawberries. 14,000 m³/h, 130µm. Spain



Golf course irrigation. 700 m³/h, 200µm. Tampa, USA



Irrigation water supply. 1800 m³/h, 50µm, Narbonne, France



Drip irrigation, 8000 m³/h, 130µm, Helche Creviente, Spain



Recreation and irrigation water supply. 3400 m³/h, 80µm. Spanish Fork, USA

SELECTED WORLDWIDE APPLICATIONS



Acquaculture-Zebra mussel control. 2000 m³/h, 25µm. Vermont, USA



Cooling water in chemical plant. 460 m³/h. Hamburg, Germany



Reservoir water for irrigation. 1000 m³/h, 100µm. Kfar Hasidim, Israel



Industrial wastewater. 800 m³/h, 50µm. Electronic industry, Korea



Injection water. 2000 m³/h, 50µm. North Sea Platform



River water for hot spa. 170 m³/h, 25µm. Japan



Pre-filtration to RO membranes. 1700 m³/h, 25µm. Desalination plant, Israel

